




[www.prospecllc.com](http://www.prospecllc.com) | 1.888.773.2845 | [info@prospecllc.com](mailto:info@prospecllc.com)

**GLAZED PORCELAIN TILE**



**Marmi Blanco Glossy**  
Ceramic Walls: 4" x 12"

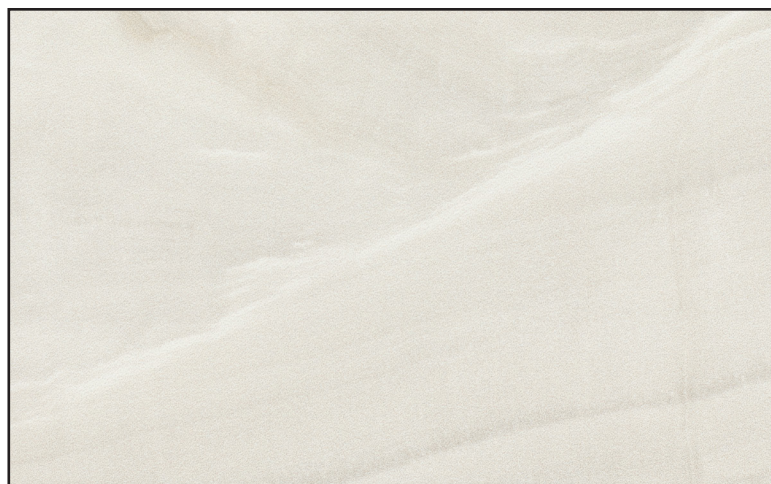


**Chrystal Onyx Glossy**  
Ceramic Walls: 4" x 12"



**Fossil Stone Glossy**  
Ceramic Walls: 4" x 12"



**Marmi Blanco Matte**  
Porcelain Floors/Walls: 12" x 24"

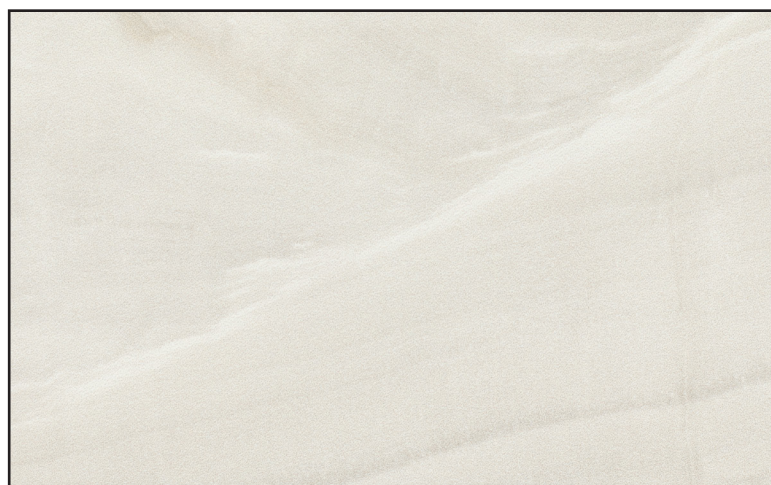


**Chrystal Onyx Matte**  
Porcelain Floors/Walls: 12" x 24"



**Fossil Stone Matte**  
Porcelain Floors/Walls: 12" x 24"



**Marmi Blanco Polished**  
Porcelain Floors/Walls: 12" x 24"

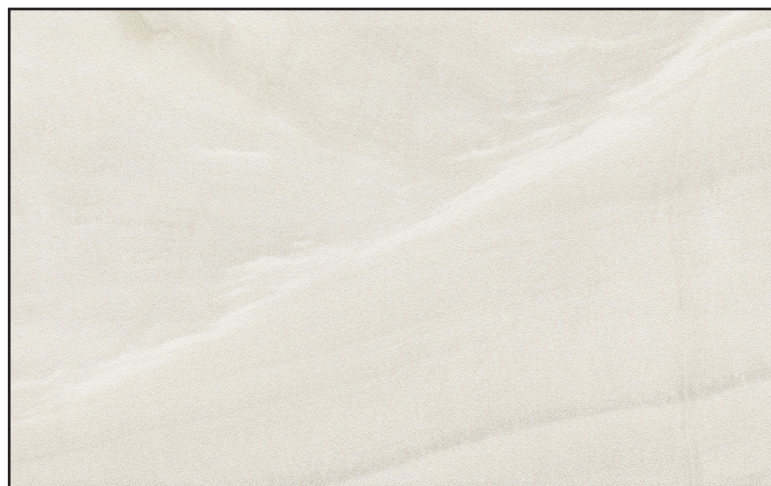

**Chrystal Onyx Polished**  
Porcelain Floors/Walls: 12" x 24"



**Fossil Stone Polished**  
Porcelain Floors/Walls: 12" x 24"



www.prospecllc.com | 1.888.773.2845 | info@prospecllc.com

**GLAZED PORCELAIN TILE**

**TECHNICAL INFORMATION**

Performance Data	ASTM Testing	Results Ceramic Wall Tiles	Results Porcelain Tiles
ANSI 137.1	Various	Meets or Exceeds	Meets or Exceeds
Water Absorption	C373	<20%	≤0.5%
Breaking Strength	C648	≥125 lbs.	≥ 275 lbs
DCOF Wet	ANSI A137.1 ANSI A326.3	N/A	Matte ≥ 0.42 Polished < 0.42
Scratch Hardness	MOHS	3	4
Frost Resistant	C1026	No	Yes



**Marmi Blanco**



**Chrystal Onyx**



**Fossil Stone**