

# GALAXY VENUS ALPE

PORCELAIN & CERAMIC TILES



## GALAXY VENUS ALPE

PORCELAIN & CERAMIC TILES

  CERAMIC WALL TILES

### Galaxy Venus Edro Alpe



32x60 cm | 13"x24" [rectified]

AC (SATIN)

18 FACES

   GLAZED PORCELAIN TILES

### Galaxy Venus Alpe



60x120 cm | 24"x48" [rectified]

AC (Satin) - DCOFWET  $\geq 0.42$

PO (Polished) - DCOFWET  $< 0.42$

16 FACES

### Galaxy Venus Alpe




60x60 cm | 24"x24" [rectified]

AC (Satin) - DCOFWET  $\geq 0.42$

PO (Polished) - DCOFWET  $< 0.42$

24 FACES

### Galaxy Venus Alpe

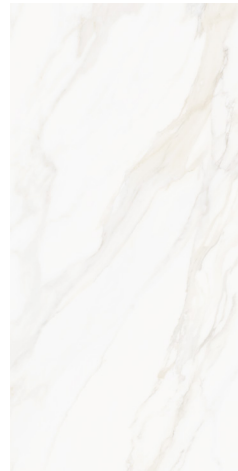


30x60 cm | 12"x24" [rectified]

AC (Satin) - DCOFWET  $\geq 0.42$

PO (Polished) - DCOFWET  $< 0.42$

24 FACES

### Galaxy Venus Alpe Mosaic



30x30 cm | 12"x12" sheet

2"x2" cuts [rectified]

AC (Satin) - DCOFWET  $\geq 0.42$

PO (Polished) - DCOFWET  $< 0.42$

TBI FACES



9.5x60 cm | 4"x24" [rectified]

AC (Satin) - DCOFWET  $\geq 0.42$

PO (Polished) - DCOFWET  $< 0.42$



# GALAXY VENUS ALPE

## PORCELAIN & CERAMIC TILES

### SIZES AND PACKING

|                                                                                   |                           | Finish        | Rect. | Work Size        | Thick   | Faces | Sq. Ft./<br>Carton | Pieces/<br>Carton |
|-----------------------------------------------------------------------------------|---------------------------|---------------|-------|------------------|---------|-------|--------------------|-------------------|
|   | 13"x24"<br>Deco Wall tile | AC (SATIN)    | Yes   | 320 x 600mm      | 9.3 mm  | TBI   | 16.47              | 8                 |
|   | 24"x48"                   | AC (SATIN)    | Yes   | 600 x 1200 mm    | 9.5 mm  | 16-18 | 15.50              | 2                 |
|                                                                                   | Wall /floor               | PO (POLISHED) | Yes   | 600 x 1200 mm    | 10.5 mm | 16-18 | 15.50              | 2                 |
|   | 24"x24"                   | AC (SATIN)    | Yes   | 600 x 600 mm     | 8.5 mm  | 24    | 19.38              | 5                 |
|                                                                                   | Wall /floor               | PO (POLISHED) | Yes   | 600 x 600 mm     | 9.3 mm  | 24    | 19.38              | 5                 |
|   | 12"x24"                   | AC (SATIN)    | Yes   | 299.5 x 600 mm   | 8.5 mm  | 24    | 13.56              | 7                 |
|                                                                                   | Wall /floor               | PO (POLISHED) | Yes   | 299.5 x 600 mm   | 8.5 mm  | 24    | 13/56              | 7                 |
| sheet size                                                                        |                           |               |       |                  |         |       |                    |                   |
|  | 2"x2"                     | AC (SATIN)    | Yes   | 299.5 x 299.5 mm | 8.5 mm  | TBI   | 9.69               | 10                |
|                                                                                   | Mosaic                    | PO (POLISHED) | Yes   | 299.5 x 299.5 mm | TBI     | TBI   | 9.69               | 10                |
|   | 4"x24"                    | AC (SATIN)    | Yes   | 95 x 600 mm      | 8.5 mm  | -     | -                  | 12                |
|                                                                                   | Bullnose                  | PO (POLISHED) | Yes   | 95 x 600 mm      | 9.3 mm  | -     | -                  | 12                |

### USAGE RECOMMENDATION

|                                                                                                    | Target<br>DCOF wet | Ceramic Wall<br>Suitable | Porcelain<br>Suitable |
|----------------------------------------------------------------------------------------------------|--------------------|--------------------------|-----------------------|
| Dry & Level – Interior Floor ( Residential / Light Commercial )                                    | N/A                |                          | ✓                     |
| Wet & Level – Interior Floor ( Residential / Light Commercial )                                    | ≥ 0.42             |                          | ✓ AC                  |
| Shower Floors ( Residential / Light Commercial )                                                   | ≥ 0.42             |                          | ✓ AC                  |
| Exterior Floor Applications<br>(including pool decking & other<br>wet areas with minimal footwear) | ≥ 0.60             |                          |                       |
| Ramps & Inclines                                                                                   | ≥ 0.65             |                          |                       |
| Exterior Walls Applications                                                                        | N/A                |                          | ✓                     |
| Interior Walls/Backsplashes                                                                        | N/A                | ✓                        | ✓                     |
| Interior Countertops                                                                               | N/A                |                          | ✓                     |
| Facades                                                                                            | N/A                |                          | ✓                     |
| Pool Linings                                                                                       | N/A                |                          |                       |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

Note: Porcelain tiles are suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

### INSTALLATION AND CARE

Grout Joint Recommendation 1/16" ( 1 mm )  
Shade Variation √2

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation. Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

Eliane's recommendation for flooring care: sweep or vacuum the surface. Then mop the floor using a mop with water and a neutral cleaner (soap less) or a general household cleaner. Follow it with a clean water rinsed mop and wipe dry the floor to prevent film formation. For wall tiles care, Eliane recommends using a cloth with water and a neutral cleaner (soap less) or a general household cleaner.

### PERFORMANCE CHARACTERISTICS

|                     | ASTM#                      | Ceramic Wall<br>Result | Porcelain<br>Result    |
|---------------------|----------------------------|------------------------|------------------------|
| Water Absorption    | C373                       | ≤ 20%                  | ≤ 0.5%                 |
| Breaking Strength   | C648                       | ≥ 125 lbs              | ≥ 275 lbs              |
| DCOF WET            | ANSI A137.1<br>ANSI A326.3 | N/A                    | ≥ 0.42 AC<br>< 0.42 PO |
| Frost Resistance    | C1026                      | No                     | Yes                    |
| Scratch Hardness    | MOHS                       | TBI                    | 4-5                    |
| Chemical Resistance | C650                       | Resistant              | Resistant              |
| Stain Resistance    | C1378                      | Resistant              | Resistant              |

### QUALITY WARRANTY

|                                                                                     |                                                                                                    |                                                                                       |                                                                                                     |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|  | Standard quality tiles manufactured by Eliane Ceramic Tiles meet ISO 13006, ANSI A137.1 standards. |  | Eliane ceramic and porcelain tiles are NOT flammable, except mesh material of mesh mounted mosaics. |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|



Porcelain Tiles are certified, ANSI/ASTM compliant, ≤ 0.5% water absorption.

### SUSTAINABILITY

 Eliane ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

 Recycled Content:  
Porcelain: TBI Pre-consumer  
TBI Post-consumer  
Ceramic : TBI Pre-consumer  
TBI Post-consumer




GALAXY VENUS ALPE

24x24 FACES



GALAXY VENUS ALPE 24X48FACES

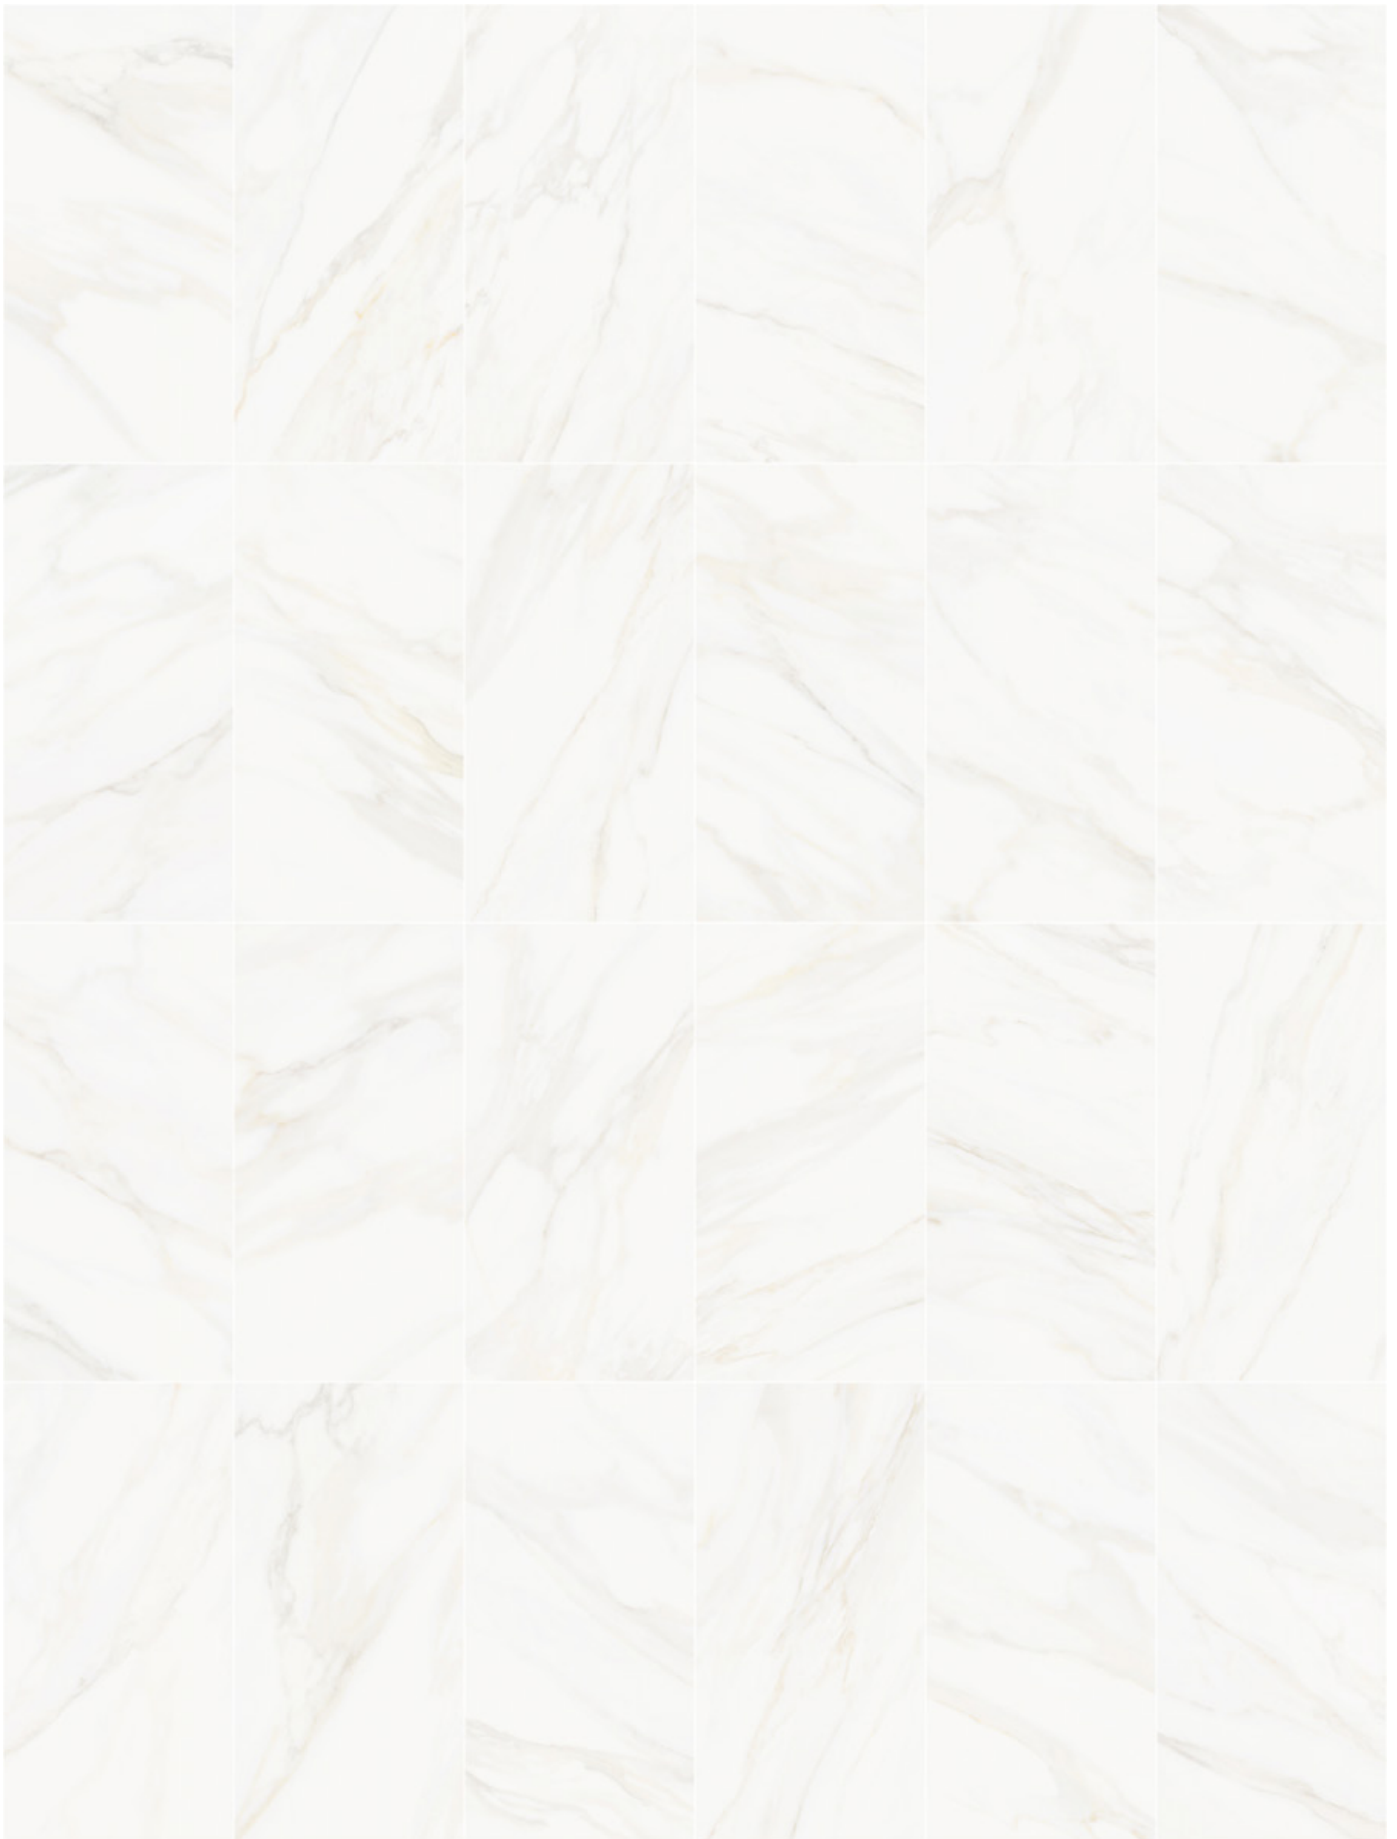

GALAXY VENUS ALPE 12x24 FACES