

NEUTRALS

WALL CERAMIC TILES




Finishes
AC / MA (Satin / Matte)
BR (Glossy)

NEUTRALS

CERAMIC WALL TILES

FIELD TILES

NEUTRALS BRANCO (WHITE) BR | AC




7,5x15 cm | 3"x6"
BIII - V1

NEUTRALS CINZA (GREY) BR | AC




7,5x15 cm | 3"x6"
BIII - V1

NEUTRALS BRANCO BR | AC (LINEAR WHITE BR | MA)




10x30 cm | 4"x12"
BIII - V1

NEUTRALS BRANCO (WHITE) BR | AC




10x40 cm | 4"x16"
BIII - V1

NEUTRALS CINZA (GREY) BR | AC



10x40 cm | 4"x16"
BIII - V1

NEUTRALS BRANCO (WHITE) BR | AC

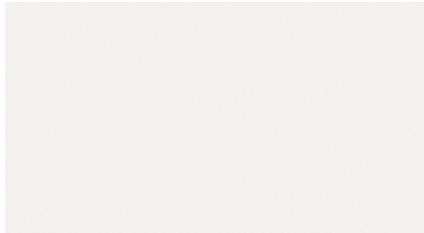

32,5x59 cm | 13"x24" [RECTIFIED]
BIII - V1

DECORATIVE PIECES*

PATCH OPERA 3 BRANCO (WHITE) BR *



10x40 cm | 4"x16"
BIII - V1

PATCH OPERA 3 CINZA (GREY) BR *




10x40 cm | 4"x16"
BIII - V1

PATCH TRIBAL BRANCO (WHITE) BR *



10x40 cm | 4"x16"
BIII - V1

PATCH TRIBAL CINZA (GREY) BR *



10x40 cm | 4"x16"
BIII - V1

***SPECIALTY PRODUCT DISCLAIMER:**

This is a finely decorative Specialty Product with metallic or distinctive glazing finishes. THESE TILES ARE SUBJECT TO SURFACE DAMAGE WHEN EXPOSED TO PHYSICAL OR CHEMICAL FORCES.

SPECIAL CLEANING INSTRUCTIONS: *These tiles have a special decorative finish with precious metals or distinctive glazing, therefore should be cleaned only with a cloth soaked in water and neutral detergent. Do not use acidic cleaning products or abrasive sponges that may damage the tiles' surface.*

TRIMS AVAILABLE



- | | | | | | | | | | | | |
|--|---|--|--|--|--|--|--|--------------------------------------|---|----------------------------------|--|
| SN 4289
Corner
5x5 cm 2"x2" (*) | S 4289
5x20 cm
2"x8" (*) | SN 4339
Corner
7,5x7,5 cm 3"x3" | S 4369
7,5x15 cm 3"x6" (*) | S 4639
Side End
7,5x15 cm 3"x6" | SN 4449
Corner
10x10 cm 4"x4" | S 44C9
10x30 cm 4"x12" (*) | S 4416
10x40 cm 4"x16" (*) | A 106
2,5x15 cm
1"x6" | UC 106
Corner
2,5x2,5 cm 1"x1" | A 4200
5x15 cm 2"x6" | AN 4200
Corner
5x5 cm 2"x2" |
|--|---|--|--|--|--|--|--|--------------------------------------|---|----------------------------------|--|

(*) Trim stocked in Texas



NEUTRALS

CERAMIC WALL TILES

PRODUCT INFORMATION

Items	Unit	Rectified	Work Size (mm)	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
NEUTRALS 10x40 4X16	SQFT	No	100x400	7 mm	1	14.64	34
NEUTRALS 32.5x59 13X24	SQFT	Yes	325x590	9.3 mm	1	16.47	8
NEUTRALS 7.5x15.5 3X6	SQFT	No	755x155	7 mm	1	10.12	80
NEUTRALS 10x30 4X12	SQFT	No	100x300	7 mm	1	10.98	34
PATCH OPERA 10x40 4X16	PC	No	100x400	7 mm	3	7.75	18
PATCH TRIBAL 10x40 4X16	PC	No	100x400	7 mm	3	7.75	18
BULLNOSE S 4416 4X16	PC	No	100x400	7 mm	1	14.64	34
BULLNOSE S 4369 3X6	PC	No	755x155	7 mm	1	10.12	80
BULLNOSE S 4289 2X8	PC	No	50x200	7 mm	1	10.98	100
BULLNOSE S 44C9 4X12	PC	No	100x300	7 mm	1	10.98	34
BULLN. CORNER SN 4289 2x2	PC	No	50x50	7 mm	1	1.18	42

USAGE RECOMMENDATION

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes - Interior	N/A	✓*
Countertops	N/A	
Facades	N/A	
Pool Linings	N/A	

*** SPECIALTY PRODUCT DISCLAIMER:**

Patch Opera and Patch Tribal are finely decorative Specialty Products with metallic or distinctive glazing finishes. THESE TILES ARE SUBJECT TO SURFACE DAMAGE WHEN EXPOSED TO PHYSICAL OR CHEMICAL FORCES.

QUALITY WARRANTY

QUALITY Meet or exceed ISO 13006, NBR 15463 and NBR 13818, ANSI A137.1 standards.

FIRE PROOF Our ceramic and porcelain tiles are NOT flammable, except mesh material of mesh mounted mosaics.

VOC FREE Our ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

INSTALLATION AND CARE

Grout Joint Recommendation 1/16"

Shade Variation  V1 - UNIFORM APPEARANCE

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

SPECIAL CLEANING INSTRUCTIONS: Patch Opera and Patch Tribal tiles have a special decorative finish with precious metals or distinctive glazing, therefore should be cleaned only with a cloth soaked in water and neutral detergent. Do not use acidic cleaning products or abrasive sponges that may damage the tiles' surface.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	≤ 20%
Breaking Strength	C648	≥ 125 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	N/A
Scratch Hardness	MOHS	4
Frost Resistance	C1026	No
Chemical Resistance	C650	Class A-Class E
Stain Resistance	C1378	Class A





